DK470 DIN RADIO INSTALL KIT

KIT CONTENTS

- 1 DB235 DIN BEZEL (C)
- 1 DC235 DIN CRADLE (**D**)
- 1 INSTALLATION HARDWARE KIT
 - 1 M4X8 BOLT AND LOCK WASHER FOR DIN CRADLE (F)
 - 2 RUBBER BUMPER PADS FOR DIN CRADLE (E)
 - 1 RUBBER O-RING FOR DIN BEZEL




INSTALLATION INSTRUCTIONS

- 1. REMOVE THE OUTER SLEEVE (B) FROM THE SOURCE UNIT (A).
- 2. SLIDE THE BEZEL (C) OVER THE SLEEVE FROM THE BACK WITH THE RECESS IN THE BEZEL FACING TOWARD THE SOURCE UNIT FACEPLATE.
- 3. INSERT THE SLEEVE AND BEZEL INTO THE CRADLE (\mathbf{D}) FROM THE FRONT.
- 4. WITH THE SLEEVE AND BEZEL AS FAR BACK IN THE CRADLE AS POSSIBLE, FOLD OUT THE TABS ON ALL SIDES OF THE SLEEVE TO HOLD THE THREE PARTS TOGETHER.

NOTE: MAKE SURE THE BENDING TABS ARE NOT PROTRUDING OUTSIDE OF THE BEZEL.

- 5. INSTALL RUBBER BUMPER PADS (E) INTO THE 2 HOLES ON THE BOTTOM OF THE CRADLE.
- 6. SLIDE THE SOURCE UNIT (\mathbf{A}) INTO THE SLEEVE ASSEMBLY FROM THE FRONT UNTIL IT LOCKS OR SNAPS INTO PLACE.

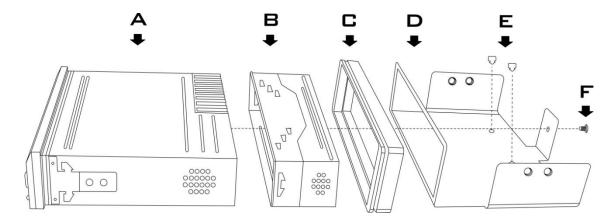

INSTALLATION INSTRUCTIONS [CONTINUED]

- 7. INSTALL THE M4X8 BOLT AND LOCK WASHER (\mathbf{F}) THROUGH THE REAR MOUNTING HOLE OF THE CRADLE AND INTO THE SOURCE UNIT.
- 8. INSTALL THE O-RING ON THE BEZEL IN THE GROOVE PROVIDED.

NOTE: FOR PAINTED INNER FAIRINGS THE O-RING MAY BE TIGHT. USE CAUTION WHEN TEST FITTING.

9. WITH THE IGNITION OFF. REMOVE THE FRONT FAIRING COVER.

TIP: REFER TO MANUFACTURERS INSTRUCTIONS IF NECESSARY.

10. REMOVE EXISTING SOURCE UNIT OR RADIO IF APPLICABLE.

TIP: REFER TO MANUFACTURERS INSTRUCTIONS IF NECESSARY.

- 11.INSERT SOURCE UNIT ASSEMBLY AS ONE UNIT THROUGH THE FRONT OPENING IN THE INNER FAIRING, MAKING SURE THAT THE WIRING FREE FALLS INTO THE FAIRING WITHOUT CATCHING OR BEING PINCHED BY ANYTHING.
- 12. LINE UP THE MOUNTING HOLES ON THE SIDES OF THE CRADLE WITH THE FACTORY MOUNTING HOLES IN THE FAIRING BRACES, AND INSTALL THE SOURCE UNIT ASSEMBLY USING THE FACTORY RADIO HARDWARE.

TIP: FACTORY RADIO HARDWARE: 1/4-20 X 3/4" BOLTS

HAWG WIRED, INC.

CONTACT US BY EMAIL

CONTACT US BY PHONE

SALES AND MARKETING – sales@hawg-wired.com
TECHNICAL SUPPORT – support@hawg-wired.com

MAIN 510.656.2999 EFAX 510.217.6994

VISIT US ON THE WEB AT HAWG-WIRED.COM



COPYRIGHT © 2015 HAWG WIRED, INC. ALL RIGHTS RESERVED. REV.4B PRINTED IN THE U.S.A.